




Collection Les best design II amiral

UPEC
CSTB
U3SP3E1C0
10/272

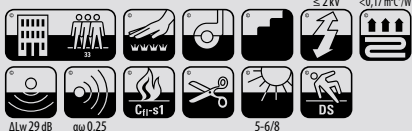

Composition 100% Polyamide
Pile material 100% Nylon
Polmaterial 100% Polyamid
Poolmateriaal 100% Polyamide
Composición 100% Poliamida
Composizione 100% Poliammide
Skład runa 100% Poliamid

**Poids de velours / Pile weight /
Poleinsatzgewicht / Poolinzetmassa /
Peso fibra / Peso felpa / Gramatura** 1 200 g/m²

**Poids total - NF ISO 8543 / Total weight /
Gesamtgewicht / Totaal gewicht /
Peso total / Peso totale / Masa całkowita** 2 285 g/m²

**Epaisseur totale - NF ISO 1765 /
Total thickness / Gesamtdicke /
Totale massa / Altura total /
Spessore totale / Wysokość całkowita** 8,5 mm

**Hauteur du velours - NF ISO 1766 /
Pile height / Polhöhe / Poolhoogte /
Altura fibra / Spessore felpa / Wysokość runa** 5,8 mm

**Envers / Backing /
Rückenausstattung / Rug /
Soporte / Sottofondo / Podklad** Double dossier /
Action back

Jauge - Serrage (points) - Densité - NF ISO 1763
Gauge - Rows (points) - Tufts 1/10⁶
Teilung - Stiche (points) - Noppenzahl 47 p
Rijen - Deling (points) - Noppenaantal 185 650 p/m²
Galga - Densidad (puntos)
Scartamento - Serraggio (punti) - Densità felpa
Zaciesznienie - Rozstaw igiel (punkty) - Gęstość

Comportement au feu Cfl-s1 - collé sur ciment
Fire resistance Cfl-s1 - glued on cement
Brennverhalten Cfl-s1 - geklebt auf Zement
Brandgedrag Cfl-s1 - verlijmd op cement
Clasificación al fuego Cfl-s1 - pegado en cemento
Comportamento al fuoco Cfl-s1 - incollato su cemento
Trudnozupalność Cfl-s1 - klejone na podłożu betonowym

HQE Ce produit répond parfaitement à 8 des 14 cibles
HQE This product meets perfectly 8 from the 14 targets
HQE Dieses Produkt erfüllt 8 von den 14 Zielen
HQE Dit product beantwoordt aan 8 van de 14 doelstellingen
HQE Este producto responde perfectamente a 8 de los 14 objetivos
HQE Questo prodotto risponde perfettamente a 8 di 14 obiettivi
HQE Ten produkt odpowiada 8 z 14 kryteriów

**LEED® (2009) : Ce produit permet de répondre aux exigences du cré-
dit IEQ 4.3 de la certification LEED, relative à la performance des produits
dans leur ensemble, et non individuellement.**
LEED® (2009): This product contributes toward satisfying Credit IEQ 4.3 under
LEED, which covers the performance of materials in aggregate, not individually.
Plus d'informations, for more information: www.usgbc.org/contact



Absorption aux bruits aériens - NF EN ISO 11654
Sound absorption / Schallabsorptionsgrad /
Geluidsabsorptie / Absorción de los ruidos αw 0,25
aéreos / Isolazione acustica /
Pochłanianie dźwięku
f/Hz 125 250 500 1000 2000 4000
αs 0,01 0,07 0,13 0,36 0,50 0,59

Pose / Entretien / Traitement
Laying / Cleaning / Treatment
Verlegelinweis / Reinigung / Behandlung
Plaatsinstructie / Reiniging / Onderhoud www.balsan.com
Instalación / Mantenimiento / Tratamiento
Posa / Manutenzione / Trattamenti
Układanie / Utrzymanie w czystości / Impregnacja


BALSAN se réserve le droit de modifier les caractéristiques de ce produit tout en conservant les mêmes qualités techniques. Dans le cadre d'une utilisation professionnelle, il est fortement conseillé d'utiliser des coloris moyens et foncés pour les pièces à grand trafic. De légères variations de coloris peuvent être observées entre les différents bains de teinture. / BALSAN reserves the right to modify the characteristics of this product while keeping the same technical properties. In the context of business use, we strongly recommend the use of darker colours for heavy traffic areas. Slight differences in colour may occur between different dye baths.



Designed and Made in France



Brume 920 4 m



Maquis 230 4 m



Falaise 610 4 m



Grenade 550 4 m



Orage 940 4 m



Pinède 250 4 m



Corde 640 4 m



Amarante 560 4 m




Azur 130 4 m



Eucalyptus 260 4 m



Havane 765 4 m



Madras 580 4 m



Céleste 140 4 m



Coriandre 970 4 m



Bois 780 4 m



Porto 595 4 m



Outremer 180 4 m




Poivre 770 4 m



Santal 760 4 m



Cassis 570 4 m



Calanque 885 4 m




Ouragan 990 4 m



Fusain 980 4 m



Lavande 850 4 m

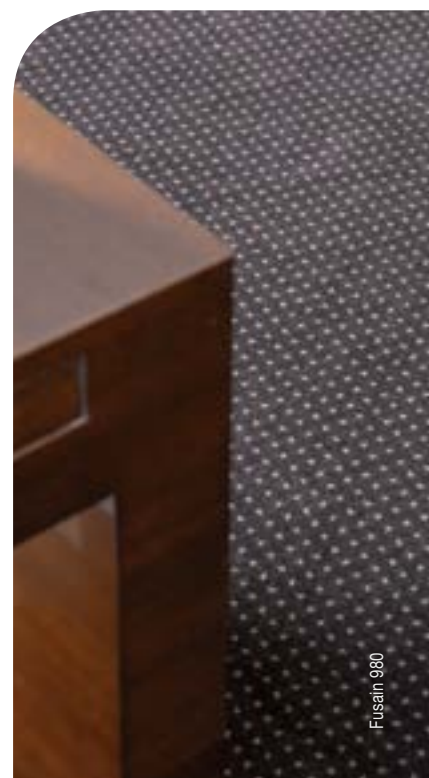

Fusain 980



RACCORD / REPEAT
Largeur / Width : 2,36 cm
Hauteur / Height : 2,34 cm



wall to wall DESIGN



custom



modular



CAHIER TECHNIQUE
TECHNICAL HANDBOOK

