



Collection Les best design II folio

UPEC
CSTB
U3SP3E1C0
10/272



Composition 100% Polyamide
Pile material 100% Nylon
Polmaterial 100% Polyamid
Poolmateriaal 100% Polyamide
Composició 100% Poliamida
Composizione 100% Poliammide
Skład runa 100% Poliamid

Poids de velours / Pile weight /
Poleinsatzgewicht / Poolinzetmassa / 1 200 g/m²
Peso fibra / Peso felpa / Gramatura

Poids total - NF ISO 8543 / Total weight /
Gesamtgewicht / Totaal gewicht / 2 285 g/m²
Peso total / Peso totale / Masa całkowita

Épaisseur totale - NF ISO 1765 /
Total thickness / Gesamtdicke / 8,5 mm
Totale massa / Altura total /
Spessore totale / Wysokość całkowita

Hauteur du velours - NF ISO 1766 /
Pile height / Polhöhe / Poolhoogte / 5,8 mm
Altura fibra / Spessore felpa / Wysokość runa


Envers / Backing /
Rückenausstattung / Rug / Double dossier /
Soporte / Sottofondo / Podkład Action back

Jauge - Serrage (points) - Densité - NF ISO 1763
Gauge - Rows (points) - Tufts 1/10^e
Teilung - Stiche (points) - Noppenzahl 47 p
Rijen - Deling (points) - Noppenaantal
Galga - Densidad (puntos) 185 650 p/m²

Comportement au feu Cfl-s1 - collé sur ciment
Fire resistance Cfl-s1 - glued on cement
Brennverhalten Cfl-s1 - geklebt auf Zement
Brandgedrag Cfl-s1 - verlijmd op cement
Clasificación al fuego Cfl-s1 - pegado en cemento
Comportamento al fuoco Cfl-s1 - incollato su cemento
Trudnozupalność Cfl-s1 - klejone na podłożu betonowym

HQE Ce produit répond parfaitement à 8 des 14 cibles
HQE This product meets perfectly 8 from the 14 targets
HQE Dieses Produkt erfüllt 8 von den 14 Zielen
HQE Dit product beantwoordt aan 8 van de 14 doelstellingen
HQE Este producto responde perfectamente a 8 de los 14 objetivos
HQE Questo prodotto risponde perfettamente a 8 di 14 target
HQE Ten produkt odpowiada 8 z 14 kryteriów

LEED® (2009): Ce produit permet de répondre aux exigences du crédit IEQ 4.3 de la certification LEED, relative à la performance des produits dans leur ensemble, et non individuellement.
LEED® (2009): This product contributes toward satisfying Credit IEQ 4.3 under LEED, which covers the performance of materials in aggregate, not individually.
Plus d'informations, for more information: www.usgbc.org/contact



Absorption aux bruits aériens - NF EN ISO 11654
Sound absorption / Schallabsorptionsgrad /
Geluidsabsorptie / Absorción de los ruidos αw 0,25
aéreos / Isolazione acustica /
Pochłanianie dźwięku

f/Hz	125	250	500	1000	2000	4000
αs	0,01	0,07	0,13	0,36	0,50	0,59

Pose / Entretien / Traitement
Laying / Cleaning / Treatment
Verlegehinweis / Reinigung / Behandlung
Plaatsinstructie / Reiniging / Onderhoud www.balsan.com
Instalación / Mantenimiento / Tratamiento
Posa / Manutenzione / Trattamenti
Układanie / Utrzymanie w czystości / Impregnacja

BALSAN se réserve le droit de modifier les caractéristiques de ce produit tout en conservant les mêmes qualités techniques. Dans le cadre d'une utilisation professionnelle, il est fortement conseillé d'utiliser des coloris moyens et foncés pour les pièces à grand trafic. De légères variations de coloris peuvent être observées entre les différents bains de teinture. / BALSAN reserves the right to modify the characteristics of this product while keeping the same technical properties. In the context of business use, we strongly recommend the use of darker colours for heavy traffic areas. Slight differences in colour may occur between different dye baths.



Designed and Made in France




Rubis 550 4 m



Taupe 740 4 m



Ginger 910 4 m



Sésame 620 4 m



Cayenne 580 4 m



Moka 780 4 m



Pepper 720 4 m




Bambou 640 4 m



Ginger 910



RACCORD / REPEAT
 Largeur / Width : 4 cm
 Hauteur / Height : 4 cm

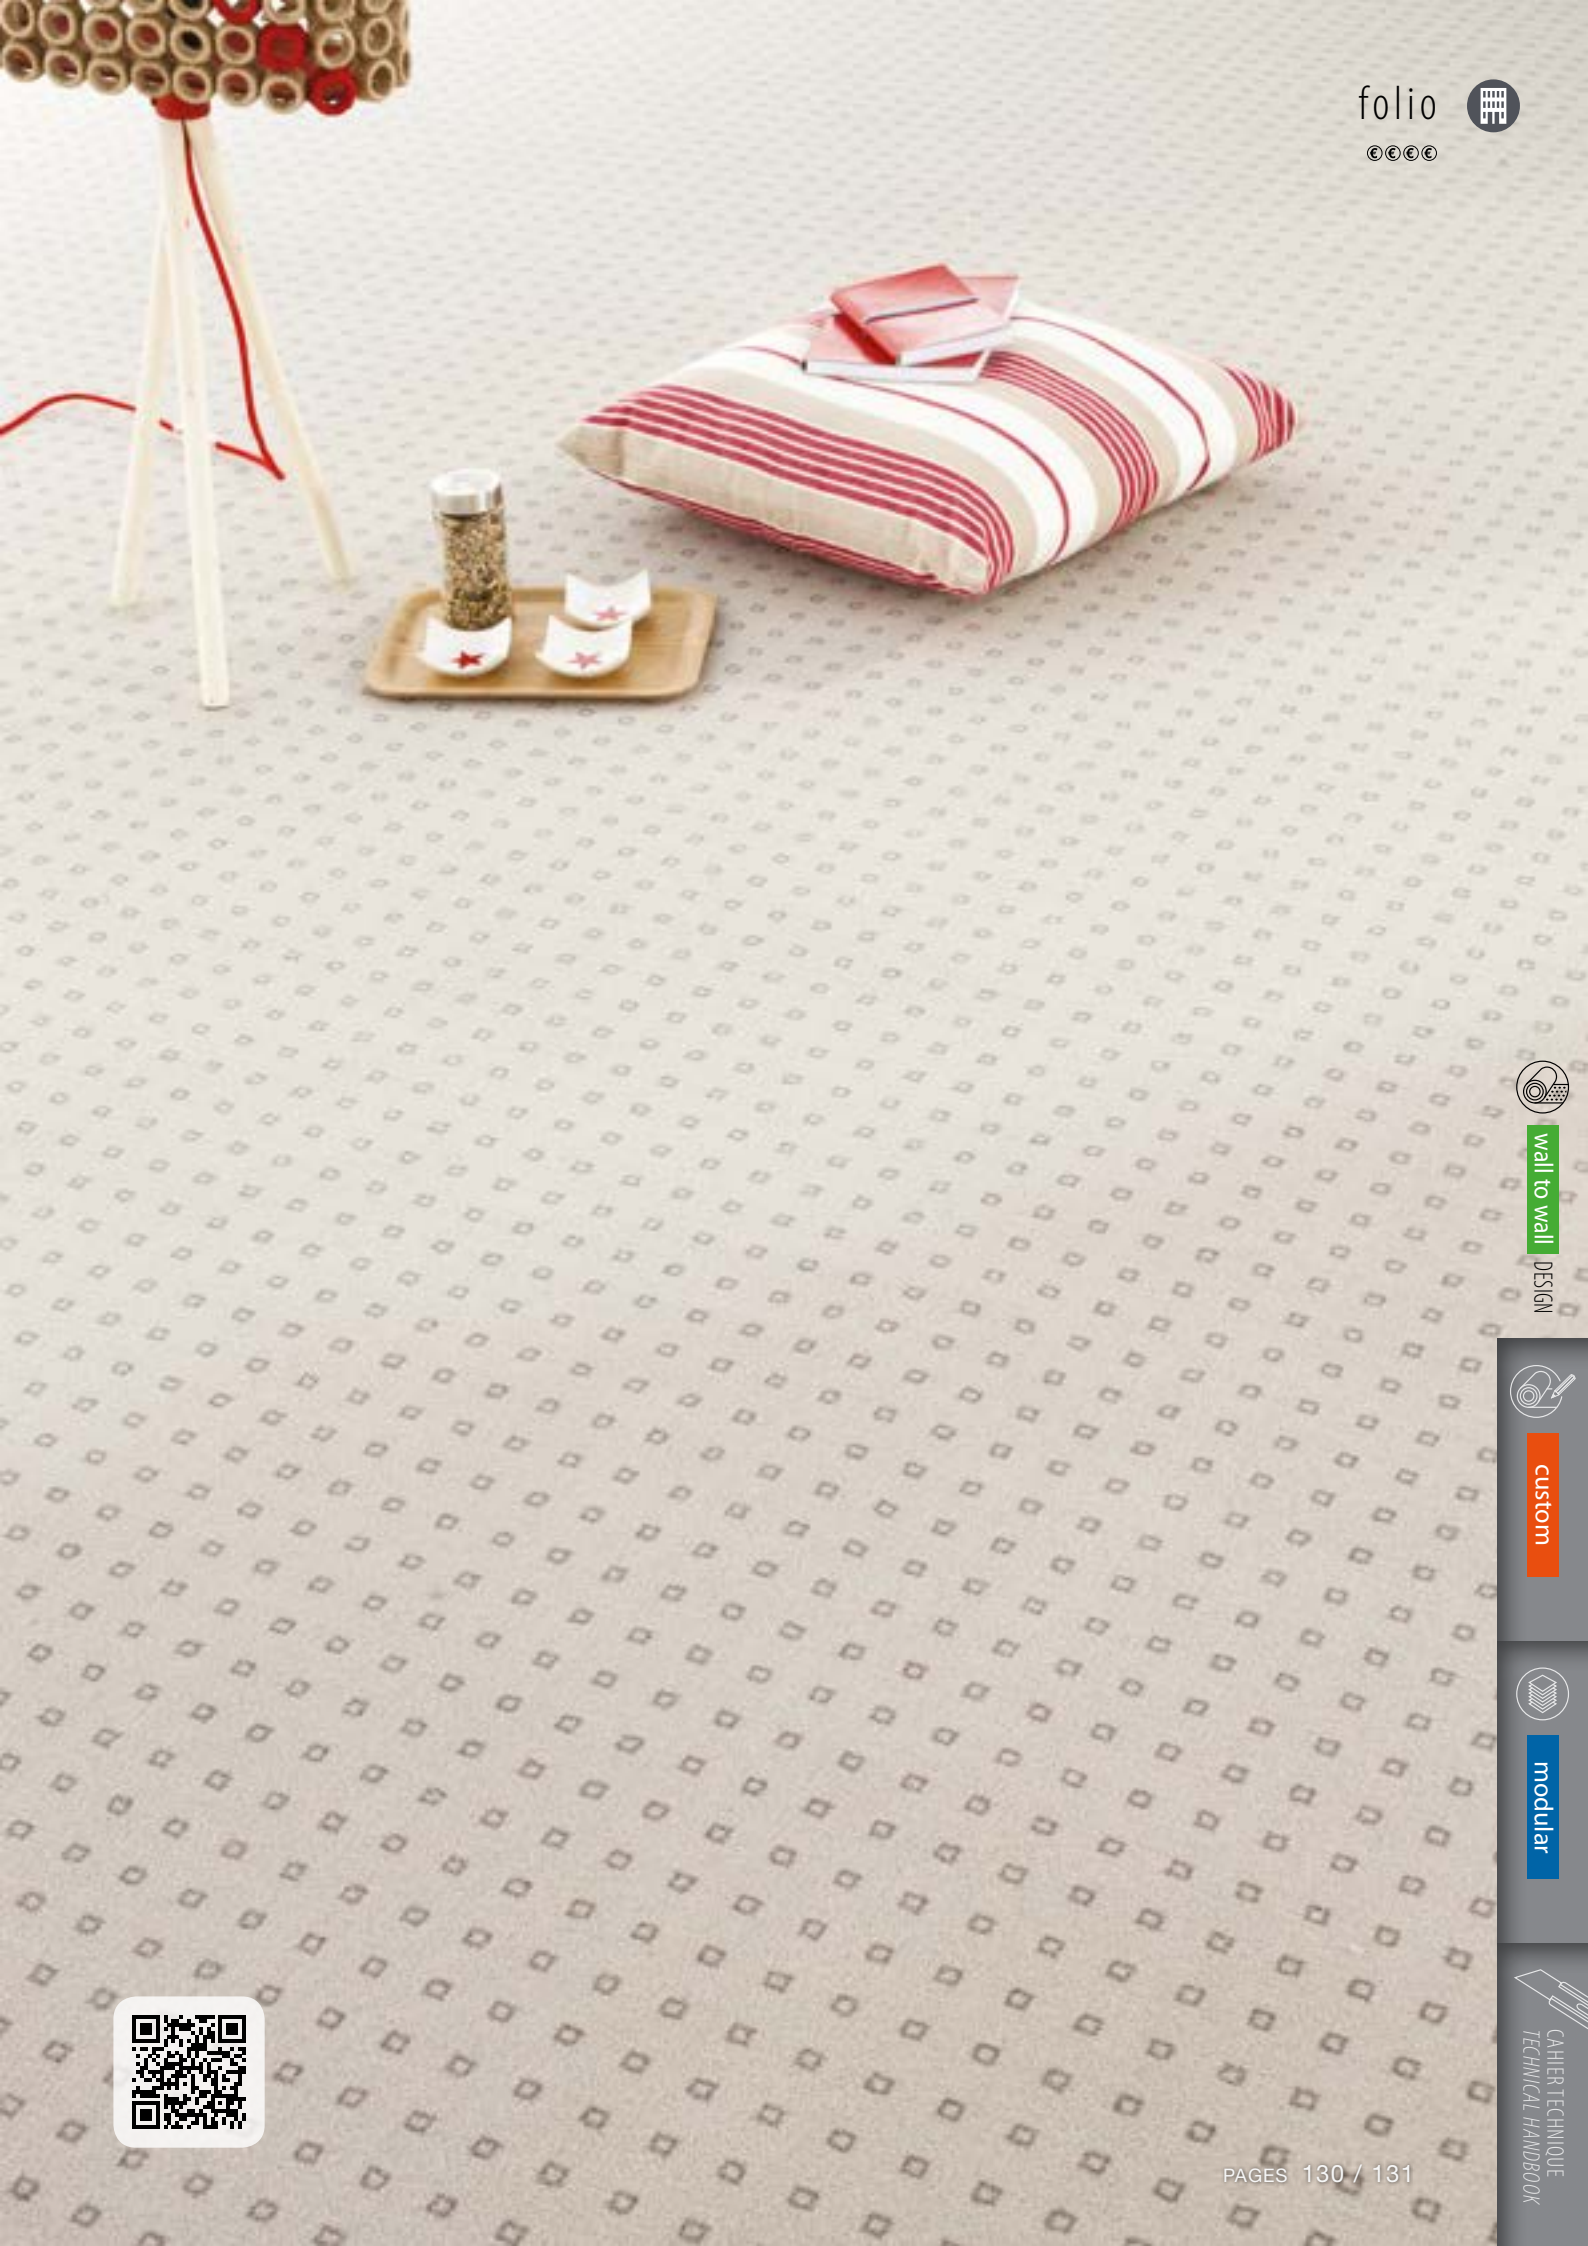

 wall to wall DESIGN

 custom

 modular

 CAHIER TECHNIQUE
TECHNICAL HANDBOOK

